

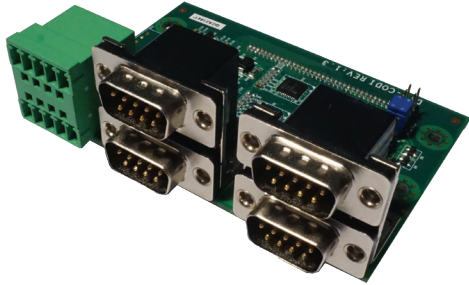


CMI-CD100

CMI Module with 4x RS-232/422/485 Serial Ports, 8x Optical Isolated DIO (4 in / 4 out)




- CMI (Combined Multiple I/O) Technology
- Serial Standards : RS-232 / 422 / 485
- Optical Isolated Design
- Serial Ports Support Up to 921.6 Kbps



Specifications

| | |
|------------------------------------|---------------------------------------|
| Interface | CMI (Combined Multiple I/O) Interface |
| Serial Port | 4x RS-232/422/485, DB9 |
| Outputs Voltage | 5V / 12V |
| Baud Rate | 921.6 Kbps |
| Digital I/O Ports | 8x Optical Isolated DIO (4DI, 4DO) |
| Optical Isolated DIO | 3.75kV |
| Isolated DIO Power Input | 9 ~ 30VDC |
| Digital Input Driving Sink Current | Minimal: 1 mA Normal: 5 mA |
| Dimension (W x D x H) | 90 x 62 x 30 mm |

Dimensions

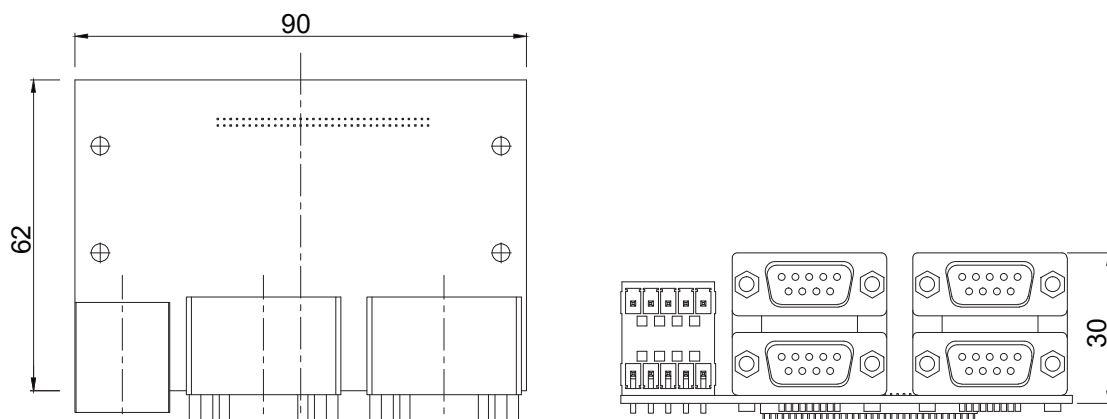

Unit: mm

Ordering Information

Available Models

| | |
|------------------|--|
| CMI-CD100 | CMI Module with 4x RS-232/422/485 Serial Ports, 8x Optical Isolated DIO (4 in / 4 out) |
|------------------|--|

Package Check List

- CMI Module x1
- Terminal Block Pack x1
- Screw Pack x1

Compatible List

| Model No. | CMI-CD100 |
|-----------|-----------|
| DS-1100 | V |
| DS-1101 | V |
| DS-1102 | V |