

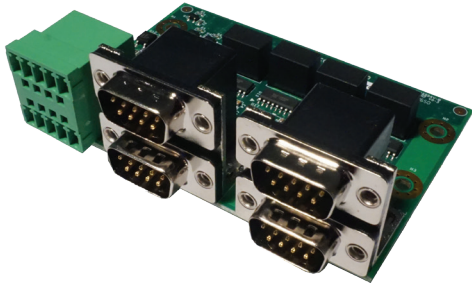


CMI-ICD100

CMI Module with 4x Electrical Isolated RS-232/422/485 Serial Ports, 8x Optical Isolated DIO (4 in / 4 out)




- CMI (Combined Multiple I/O) Technology
- Electrical Isolated Serial Ports
- Optical Isolated DIO Prots



Specifications

Interface	CMI (Combined Multiple I/O) Interface
Serial Port	4x RS-232/422/485, DB9
Electrical Isolated Serial	2.75KV rms
Baud Rate	921.6 Kbps
Digital I/O Ports	8x Optical Isolated DIO (4DI, 4DO)
Optical Isolated DIO	3.75kV
Isolated DIO Power Input	9 ~ 30VDC
Digital Input Driving Sink Current	Minimal: 1 mA Normal: 5 mA
Dimension (W x D x H)	90 x 62 x 30 mm

Dimensions

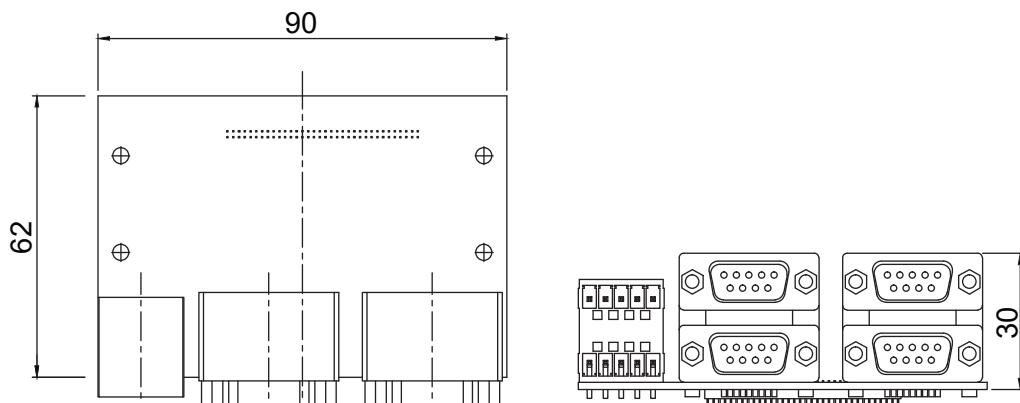

Unit: mm

Ordering Information

Available Models

CMI-ICD100	CMI Module with 4x Electrical Isolated RS-232/422/485 Serial Ports, 8x Optical Isolated DIO (4 in / 4 out)
-------------------	---

Package Check List

- CMI Module x1
- Terminal Block Pack x1
- Screw Pack x1

Compatible List

Model No.	CMI-ICD100
DS-1100	V
DS-1101	V
DS-1102	V